

OPENING PORTLIGHTS

SELECTION INFORMATION



INTRODUCTION

Hatches/Portlights **Introduction** Features Dimensions Fixtures

Maxwell's Euro-styled low profile portlights complement the aesthetics of any craft. Extruded aluminium inner and outer frames are anodised in silver. The 10mm smoke-grey acrylic window features a bevelled edge and is supplied with insect screen, white moulded dress trim and stainless steel mounting screws. Trim accommodates up to 40mm (1 9/16") thickness.



3 YEAR
Limited Warranty

MAXWELL

OPENING PORTLIGHTS

SELECTION INFORMATION



[Hatches/Portlights](#) [Introduction](#) [Features](#) [Dimensions](#) [Fixtures](#)

FEATURES

Trims and Screens

Maxwell's vacuum molded PVC inner dress trims are designed for hull/superstructure thickness up to 40mm (1 9/16") as standard. Portlight screens are constructed with an attractive lightweight fibreglass mesh, which is UV stabilised and mildew resistant in even the warmest tropical climates.

Frames

Opening portlights feature silver inner and outer extruded aluminium frames and come complete with stainless steel mounting screws for quick installation.

Note: All opening portlights must be installed above waterline.



3YEAR
Limited Warranty

MAXWELL

OPENING PORTLIGHTS


SELECTION INFORMATION



Hatches/Portlights Introduction Features **Dimensions** Fixtures

DIMENSIONS

CODE	CUTOUT SIZE MM (X - Y)	CUTOUT SIZE IN" (X - Y)	CUTOUT RADIUS MM	CUTOUT RADIUS IN"	OUTSIDE SIZE MM (X - Y)	OUTSIDE SIZE IN" (X - Y)	HEIGHT ABOVE DECK MM (W)	HEIGHT ABOVE DECK IN" (W)
WP000S	297 x 162	11 11/16 x 6 3/8	57	2 1/4	315 x 180	12 3/8 x 7 1/8	N / A	N / A
WP001S	350 x 175	13 3/4 x 6 7/8	57	2 1/4	368 x 193	14 1/2 x 7 5/8	N / A	N / A
WP002S	407 x 162	16 1/16 x 6 3/8	57	2 1/4	425 x 180	16 7/8 x 7 1/8	N / A	N / A
WP003S	435 x 175	17 1/8 x 6 1/8	57	2 1/4	453 x 193	17 5/8 x 7 5/8	N / A	N / A
WP004S	634 x 175	25 x 6 7/8	57	2 1/4	652 x 193	25 1/2 x 7 5/8	N / A	N / A

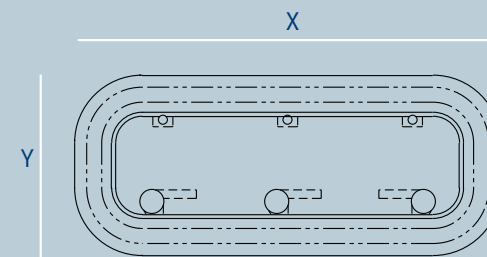

3 YEAR
Limited Warranty



Do not cut opening before receiving your Hatch or Portlight.
Hatches and Portlights should be fitted to a flat surface with a maximum tolerance of 1mm.

MAXWELL