




**3 YEAR**  
Limited Warranty




VC300FAST

### Features

- Vertical design suits smaller powerboats or sailboats and can be utilised for anchor rodes, as a docking capstan on larger craft, or auxiliary line hauling from any direction.
- High quality finish on above deck components, hard wearing chrome over marine-grade bronze.
- Functional rope hauling from any direction using independent MAX-grip™ snag-free warping drum for positive control of all ropes.
- Simplified through deck installation by modular design and precise alignment of gearbox to the topworks utilising marine-grade stainless steel bolts.
- Alternative gearbox/motor positions accommodate virtually all installation situations.
- Compact, reliable gearbox, made of corrosion resistant materials.
- Anodized aluminium gearbox and spacer on VC300, VC500, and VC1000 models.
- Heavy duty, dual direction motors, designed for marine winches.
- Easily disassembled for servicing.
- Can be mounted horizontally for use as a pot hauler or davit winch.

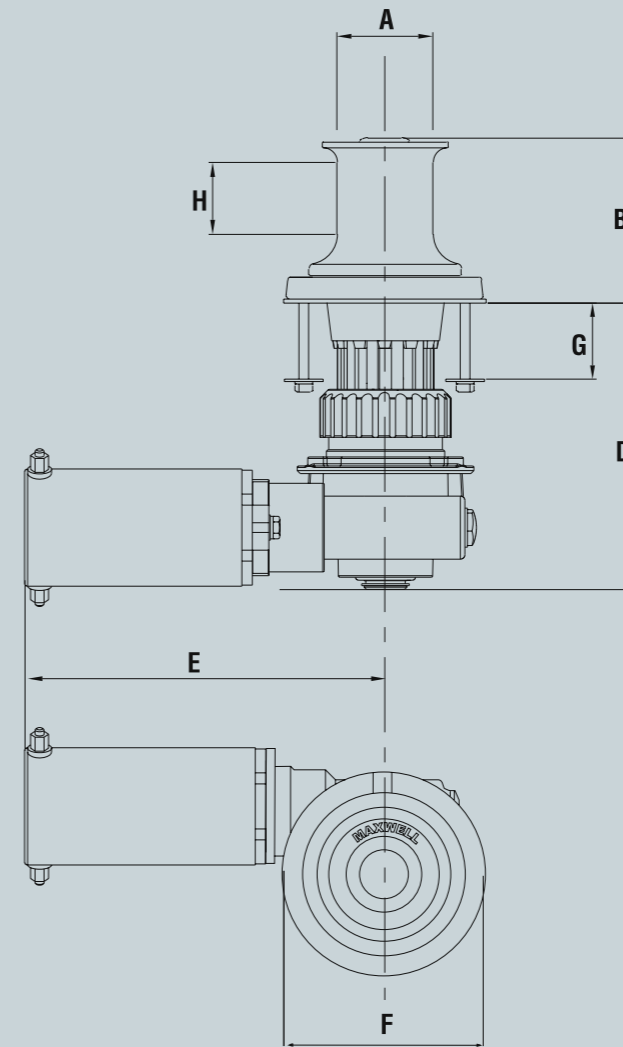

The VC Series is designed for simple, low cost anchor recovery on smaller boats and rope hauling on larger vessels

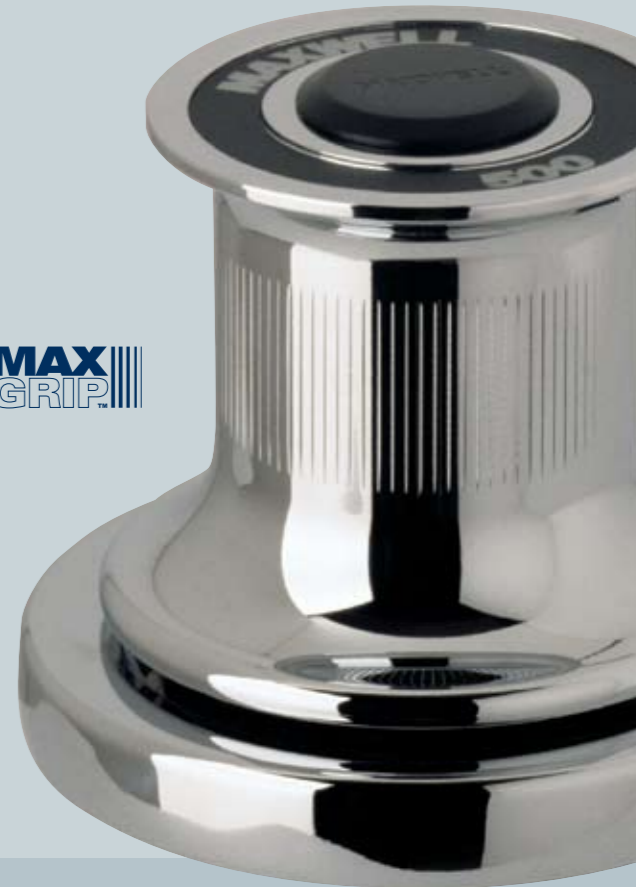

### STANDARD EQUIPMENT REQUIRED FOR SINGLE DIRECTION CONTROL

Circuit breaker/isolator panel (supplied with DC units only)  
Foot Switches (supplied with DC units only)

### OPTIONS

Traditional bronze finish  
Extra deck clearance  
Hydraulic motor\*

### ANCHORMAX SPECIFICATIONS

Maximum Line Pull	386kg (850lbs)
Speed @ nominal working load (80amps with 100kg/220lb load)	24m/min (76' per min)
Voltage	12V
Power	600W
Weight	8kg (17.6lbs)
Maximum Boat LOA	10m (33')
Maximum Boat Weight	4 tonnes

## ANCHORMAX™

An extremely versatile vertical capstan or general purpose electric winch for use as an anchor winch, pot hauler or davit winch.




The ANCHORMAX™ has an extremely high power to weight ratio. The compact, fully sealed gearbox is driven by a vertically mounted, permanent magnet motor. Intrusion below decks is minimised making the design ideal for boats from 5m (16ft) to 10m (32ft). Fitting to the boat is simplicity itself as no dismantling of the winch is required.

The ANCHORMAX™ gear housings are marine-grade alloy and the drum is chromed bronze. It is supplied as a single direction (clockwise) unit, complete with deck switch, fastenings, template and fitting instructions.


Note: The ANCHORMAX™ should not be used to haul halyards.

Note: The ANCHORMAX™ is not recommended for hauling chain.

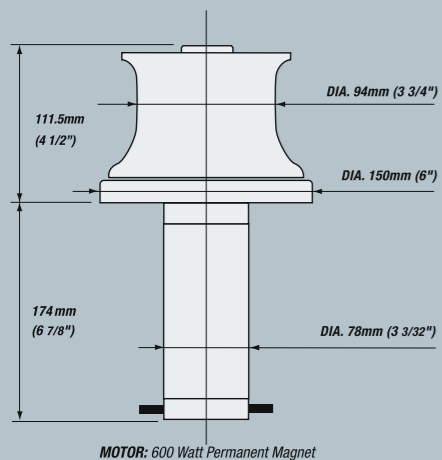

MOTOR: 600 Watt Permanent Magnet

**2 YEAR**  
Limited Warranty

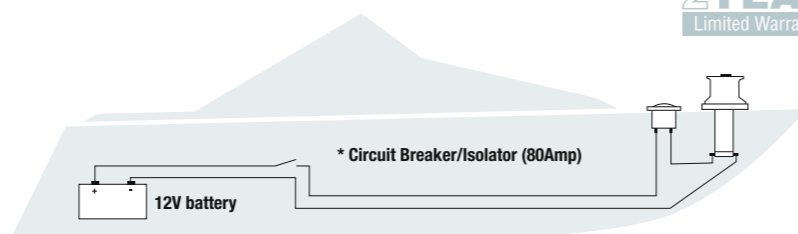

\*Not supplied with but recommended

### SPECIFICATIONS

Model	300	500	1000
Maximum Pull	136kg 300lbs	227kg 500lbs	455kg 1000lbs
Line Speed (Normal Working)	39m/min 128ft/min	18m/min 60ft/min	20m/min 65ft/min
Power Supply (DC)	12 or 24V	12 or 24V	12 or 24V
Motor (Watts)	600W	600W	1000W
Net Weight (Electric)	10kg 22lbs	10kg 22lbs	18kg 40lbs
Hydraulic Pressure	*N/A *N/A	*N/A *N/A	100bar 1450psi
Hydraulic Flow	*N/A *N/A	*N/A *N/A	20l/min 5.3USgal/min
Net Weight - Hyd	*N/A *N/A	*N/A *N/A	11kg 24lbs

### DIMENSIONS

Model	300	500	1000
A	65mm 2 9/16"	65mm 2 9/16"	80mm 3 1/8"
B	106mm 4 3/16"	106mm 4 3/16"	122.5mm 4 5/6"
D (Std deck clearance)	173mm 6 7/8"	173mm 6 7/8"	252mm 9 15/16"
E	245mm 9 5/8"	245mm 9 5/8"	272mm 10 3/4"
F	132.5mm 5 7/32"	132.5mm 5 7/32"	160mm 6 5/16"
G (Std deck clearance) OR**	57mm 2 1/4"	57mm 2 1/4"	100mm 4"
G (Extra deck clearance) ^	N/A N/A	N/A N/A	150mm 6"
H (Working height of drum for rope warping)	37.5mm 1 1/2"	37.5mm 1 1/2"	44mm 1 3/4"

\*\*For VC1000 a shorter deck clearance version is also available at 50mm (2")

^ A deck clearance increase will also increase the 'D' measurement by the same increment.